



FS280 is used as a beveled intermediate piece to join two sections of paneling for 1" thick wall finishing installations. Available in a natural color. Pantone Match Color Available. (Lead times & minimum quantities apply)

This Track is perfect for use with our Fabric Wall Finishing System. Combined with our ReCore® Backing and Fabric, this track can be used to create anything from full-wall photographic murals to smaller acoustic or bulletin-board panels as well as Wainscoting and other types of Wall-Protection.



FS250 EDGE & FS280 JOINT ON SAMPLE PANEL
ROCKSTAR & ANCHORAGE FABRIC SHOWN




FS250 EDGE & FS280 JOINT ON SAMPLE PANEL
FS250-NAT (NATURAL) & FS280-NAT (NATURAL) SHOWN

TRACK FEATURES


Height	Edge Profile	Load Direction	Seam Usage	Edge Usage	Other
<p>1" THICK</p>	<p>BEVELED</p>	<p>FRONT</p>	<p>YES</p>	<p>NO</p>	<p>NONE</p>

Color	Natural	<p>Since FS280 is completely hidden when installed, we offer it in Natural only.</p> <p>Pantone Match Colors are available but extended lead times and minimum quantities apply.</p>
Part #	FS280-NAT	

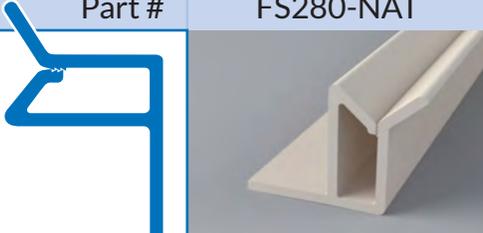

Track Features		Feature Description
Height	1"	One-Inch Track is ideal for acoustic applications, offering excellent sound absorbency, tackability and wall-protection.
Edge Profile	Beveled	A Beveled Edge Profile has a sophisticated taper, that eases the edges and seams together.
Load	Front-Loading	FS280's front loading feature allows it to be placed up against almost any surface including walls, door moldings, etc.
Usage	Intermediate	Used as an intermediate (mid-wall) track with any ½ inch substrate to create a seam between two panels.

TECHNICAL CUTAWAY

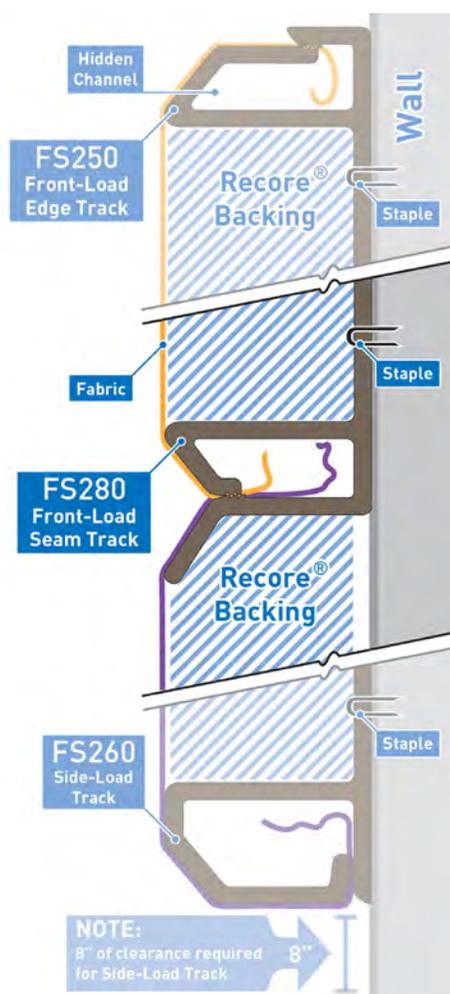

FS280 SPECIFICATIONS

Description Durable PVC Track for use in Fabric Wall Finishing

Sold In 5' Lengths

Installation Mountable with

- Drywall Screws
- 18 Gauge 1/4" Full-Crown Staples
- Adhesive

Customization Easily cut with:

- 180 Tooth 10" Plastic Weight Chop Saw

Composition 100 % Durable PVC

Dimensions 5' x 1" x 1.25"

Weight 1 lb per 5' stick

Disposal Fully Recyclable

Handling Safe To Handle

Fire Rating ASTM E84 Class A

VOC's < 0.1%